This Page Is Inserted by IFW Operations and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: G06F 1/00, H04Q 7/38, H04L 9/32

A1

(11) International Publication Number:

WO 97/31306

(43) International Publication Date:

28 August 1997 (28.08.97)

(21) International Application Number:

PCT/FI97/00067

(22) International Filing Date:

6 February 1997 (06.02.97)

(30) Priority Data:

960820

23 February 1996 (23.02.96) FI

(71) Applicant (for all designated States except US): NOKIA MOBILE PHONES LTD. [FI/FI]; Pl 86, FIN-24101 Salo (FI).

(72) Inventors; and

- (75) Inventors/Applicants (for US only): SORMUNEN, Toni [FI/FI]; Artturintie 6, FIN-33880 Sääksjärvi (FI). KURKI, Teemu [FI/FI]; Lahtomäenkatu 3 G 102, FIN-33580 Tampere (FI).
- (74) Agents: PURSIAINEN, Timo et al.; Tampereen Patenttitoimisto Oy, Hermiankatu 6, FIN-33720 Tampere (FI).


(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: METHOD FOR OBTAINING AT LEAST ONE ITEM OF USER AUTHENTICATION DATA

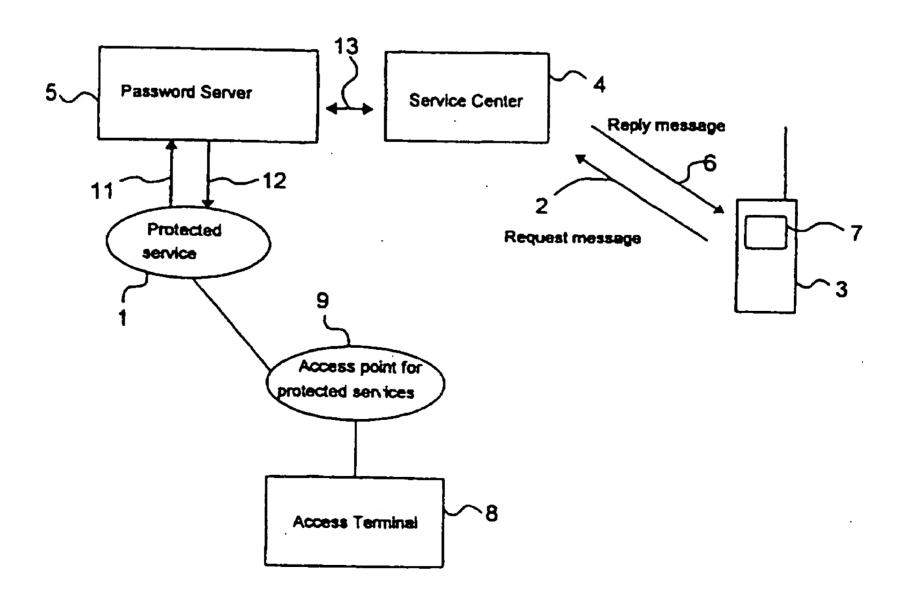

(57) Abstract

A method for obtaining at least one item of user specific data, wherein the user specific data is obtained at least partly by using paging or a short message service.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	1E	Ireland	NZ	New Zenland
BG .	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR .	Brazil	KE	Kenya	RO	Romania
BŸ	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic	SD	Sudan
CF	Central African Republic		of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
СН	Switzerland	KZ	Kazakhstan	12	Slovenia
CI	Côte d'Ivoire	u	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ.	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	-
EE	Estonia	MD	Republic of Moldova	ÜA	Trinidad and Tobago Ukraine
ES	Spain	MG	Madagascar	UG	- · · · · - · · · ·
Fl	Pinland	ML	Mali	US	Uganda
FR	France	MN	Mongolia	UZ	United States of America
GA	Gabon	MR	Mauritania	VN	Uzbekistan Viet Nam

WO 97/31306 1 PCT/FI97/00067

Method for obtaining at least one item of user authentication data

The invention relates to a method and system for obtaining at least one item of user specific authentication data, such as a password and/or a user name.

Information services refer in this specification chiefly to electronic information services which can be used by a data processor or the like. For using an information service, a data transmission connection is formed from the data processor to the information service, which is for example an application in the computer of the information service provider. The data transmission connection can be formed for example by using a telecommunication network or a mobile communication network. Upon using an information service, usually user specific authentication data is required, for example a user name and password, which are given with a data processor at the stage when the connection to the information service is formed. The user name and the password enable the information service provider to control the user using the information service, wherein also invoicing can be directed to the users appropriately for example according to usage time. A further object of the user name and the password is to prevent unauthorized use of the information service.

A wide range of services is available for example via the Internet network. Via the network it is possible to make orders and to scan databases and articles. In addition, many banks offer their customers the possibility to pay bills and enquire account transactions using a data processor at home or even at work.

- A user name is user specific and it is usually not changed in different connection set-ups. Passwords, on the other hand, can be divided into three main types:
- One single password valid as long as the user is a registered subscriber to the service. A password of this type is used mainly in services with less need for security.

5

10

15

15

25

30

35

- A list of single-connection passwords, each valid for only one connection. For the first connection, the first password is used, for the second connection, the second password is used, etc., as long as all the passwords in the list are used. Subsequently, a new set of passwords has to be ordered before the service can be further used. In some services a new list is sent within a short notice before the last password in the list is used in order to minimize the possible interruption at the list change. Passwords of this type are commonly used with information services provided especially by banks.
 - A periodical password valid for a predefined period of time. This type of password may be used within the period determined for the password regardless of how many times the connection is made. The validity period may be for example a month or a year, after which the password is to be changed into a new one.
- Especially when using passwords of the type 2., the problem is that the list has to be kept safe and account of the last used password has to be kept in one way or another. Thus the possibility of abuse is great, especially if the list and the user name are preserved in the same place.

Regardless of which password type is used, it is the user of the service who is to a great extent responsible for data security, and the service provider has few possibilities to prevent and control abuse for example in case the password falls into the wrong hands.

When a new user starts using the information service, the user has to register to the information service provider. This may be done for example by a written subscription request, in which the user gives his or her personal data and other information required, most often by mail, electronic mail (e-mail) or facsimile. In due course, the new user is sent a user name and a password or a list of passwords. These are sent most commonly by mail. In some cases the information may also be sent by facsimile, but in this case it is more likely that the user name

WO 97/31306 3 PCT/FI97/00067

and the password fall into the wrong hands. Also electronic mail may be used for informing a user name and a password. However, especially the Internet network is an open network in which the communicated data is in unenciphered form. Furthermore, unauthorized persons can easily read information transferred via the Internet.

In some cases, the user is mailed the information that the user specific authentication data may be dispatched from a post office or bank. In this case the identity of the user can still be checked when the authentication data is despatched.

Figure 1 shows a flow diagram of a commonly used method for obtaining user specific authentication data. The person (block 101) who wants to become a user of an information service, sends a subscription request (block 102) to the information service provider (block 103). The information service provider sends a subscription form to the user (block 104). Having filled in the form (block 105), the user sends it back to the service provider for example by facsimile or by mail (block 106). The information service provider subsequently handles the form and allots the user the user specific authentication data and sends it for instance by mail, electronic mail or facsimile (block 107). Having received the user specific authentication data, the user can start using the information service (block 108).

25 For example in the Internet network, some information service providers use a method for registering a new user, whereby the person who intends to become a user, forms a data transmission connection to the Internet address of the service provider. Thus in the display unit of a data processor a subscription form is produced, in which the user may 30 fill in his or her personal data by using the keyboard of the data processor. Information to be filled in include e.g. forename, surname, a proposal for user name and password. After the information has been filled in, the data is saved to be processed in the computer of the service provider. The information service provider handles the information and, 35 when accepting a new user, forms a record or the like for the user, in which the data of the new user is saved. After accepting the new user, the information service provider sends the information of this to the Internet address of the user. Next, the new user may form a connection

5

10

15

WO 97/31306 4 PCT/FI97/00067

to the information service. In this method the user may in other words inform the desired password, in which case the information service provider does not send the password with a return message. Also this method includes for example the disadvantage that the user specific authentication data in connection to the subscription request is transmitted via a data network, whereby it is possible that the password and the user name fall into the wrong hands.

The interval between the potential user has sent a subscription request and receives the user specific authentication data is a few days, even weeks. A somewhat shorter delay is reached in situations in which the subscription request can be made via a data processor by contacting the computer of the service provider. Even in cases like this, the handling of the subscription data takes some time, possibly a few days, which means that the using of the service can not be initiated before this.

An object of the present invention is to eliminate the disadvantages disclosed above and to establish a method wherein transmission of user specific authentication data from the service provider to the user of the service can be performed as fast and as safely as possible. The invention is based on the idea that user specific authentication data is transmitted to the user by using, at least partly, a paging system or a short message service. The method according to the invention is characterized in what will be mentioned in the characterizing part of the appended claim 1. The system according to the invention is characterized in what will be mentioned in the characterizing part of the appended claim 13.

The present invention can be applied especially in such telecommunication systems in which it is possible to transmit short messages to a terminal belonging to the telecommunication system on the basis of a terminal key, such as a telephone number. This quality is included in mobile communication systems. In publication TSK 19 "Matkaviestin-sanasto" by Tekniikan sanastokeskus (Finnish Center for Technical Vocabulary) a mobile communication system is defined as a telecommunication system composed of a mobile communication network and mobile stations. Mobile communication systems include for example a

5

20

cellular system, a paging system and a mobile phone system. A cellular system, such as the GSM system, is a mobile communication system in which a cellular network is used. A paging system is a one-way mobile communication system intended for paging. A mobile phone system is a two-way mobile communication system primarily intended for speech transmission. It is advantageous to apply the present system in mobile communication systems which include short message service (SMS) or paging.

- The present invention provides considerable advantages over methods of prior art. The method according to the present invention enables very fast subscription, whereby the using of the service may be initiated almost immediately after a subscription request has been sent, because transmission of user information is conducted in enciphered, electronic form and the receiver can be recognized in order to prevent abuse. A further advantage of the fast data transmission is that the validity of passwords can be shortened remarkably and security may thus be improved.
- The invention will be described in more detail below with reference to the appended figures, in which
 - Fig. 1 shows a block diagram of a method in transmitting a user name and passwords according to prior art,
 - Fig. 2 shows a method for transmitting a user name and passwords according to a preferred embodiment of the invention, and
- 30 Fig. 3 shows an alternative embodiment of the invention for transmitting a user name and passwords.

According to a preferred embodiment of the invention illustrated in Fig. 2 a two-way questionnaire of user specific authentication data exhibits only those blocks essential in application of the method. For obtaining the password or the list of passwords required for using a service 1, the user of the service sends a short message 2 from a paging terminal 3, such as a mobile station. The short message 2

25

WO 97/31306 ' 6 ' PCT/FI97/00067

includes a password request and possibly also a subscription request for a new user. With the short message from the paging terminal 3, authentication data of the sender is sent to a paging service center 4. The form of the data depends on the type of the message system used. For example the GSM system allows sending short messages, wherein a GSM mobile station can be used in implementation of the method according to the invention. The short messages are transmitted in enciphered form, whereby it is almost impossible for outsiders to decipher the content of the short messages. In formation of a short message for example a keyboard of a mobile station may be used or the message can also be supplied from the keyboard of a data processor coupled to a mobile station. Further, the message can be sent by forming a data transmission connection to the Internet network, to the so-called WWW (World Wide Web) page of the information service provider, and giving the user authentication data as well as the number of the mobile station, to which the authentication data is transmitted preferably in a short message. Thus the mobile station is not needed in the data inquiry phase.

The paging service center 4 processes the incoming message and forms according to it a data transmission connection to a password server 5 and transmits the inquiry to it. The password server 5 processes the message and forms a reply message containing one or more passwords and the user name in case a new user is registered. The formation of the reply message can be automatic or it can require processing of the information in one way or another, before a password and a possible user name can be admitted. A more detailed processing of this phase depends on the service provider and it is not significant in view of applying the present invention; consequently a more detailed description of the subject is herein unnecessary.

The paging service center 4 is for example in the GSM system advantageously a short message service center.

The password server 5 transmits the password and/or the user name to the short message service center 4, which forms according to the data a reply message 6, which is sent to the paging terminal 3 preferably in enciphered form. The short message service center 4 for example

5

10

WO 97/31306 7 7 1 PCT/FI97/00067

attends to that the short message is sent to the correct paging terminal 3. Herein it is possible to utilize the information in the connection of the message received by the short message service center 4 from the paging terminal 3. The reply message 6 arrived to the paging terminal 3 can be shown to the user for example by the display means 7 of a mobile station used as a paging terminal. The user may subsequently start using the service 1.

In order to be identified the user forms by a data processor 8 a data transmission connection to a verification service 9 of the service 1. After the user has given his or her user name and the valid password, the verification service 9 transmits the given data to the service 1, which sends a check request 11 of the user name and the password to the password server 5. The password server 5 examines the data and communicates in a reply message 12 to the service 1 whether the user name and the password are given correctly. If the data is correct, the user has a data transmission connection from the data processor 8 to the service 1. In case the user name or the password are given incorrectly, the password server 5 communicates this to the service 1, wherein the use of the service 1 is prevented. Furthermore, the password server 5 can give a report to the service provider, which is capable of using this information when controlling possible abuse attempts of the service 1.

25 The data processor 8 can have a data transmission connection to the mobile station 3. Thus the subscription request can be formed in the application software of the data processor 8, for example in a terminal program. The application software of the mobile station 3 forms a short message 2 on the basis of the subscription data given through the 30 application software of the data processor. In a corresponding manner, the reply message 6 is processed in the application software of the mobile station and transmitted to the data processor 8, whereby the user is given his or her user-specific authentication data for using the information service. The use of the information service can then be 35 started immediately by forming a data transmission connection with the service 1, as described above. The data transmission connection is formed advantageously through a mobile station. An advantage of this method is for example the fact that subscription as a user of the infor-

5

10

15

WO 97/31306 PCT/FI97/00067

mation service can be performed anywhere within the receiving area of the mobile communication network in which the mobile station 3 is connected.

The data transmission connection for using the information service from the data processor 8 can be formed also as a modem connection to a wireline telecommunication network, which is known as such.

The service block 1, the password server block 5 and the verification service block 9 shown in the block diagram of Fig. 2, can be placed for example in the mainframe of the service provider or the like, or they can be separate data processors between which data transmission connections are formed.

The data transmission connection 13 between the short message service center 4 and the password server 5 can be for example a direct connection by using ISDN/LAN (Integrated Services Digital Network / Local Area Network) or a corresponding connection. Also this is prior art known as such. Transmission of short messages between the paging terminal 3 and the short message service center 4 is made preferably at least partly in a wireless manner, for example by using a mobile communication network.

Fig. 3 shows a reduced block diagram of another advantageous embodiment according to the present invention. The difference to the embodiment of Fig. 2 lies primarily in the fact that a paging terminal which is only capable of receiving messages can also be used as the paging terminal 3. In such a case, a subscription request is formed by a data processor 8 and transmitted to a verification service 9. The verification service 9 transmits the received message further to a password server 5. A reply message 6 is formed principally as described in connection with Fig. 2. As the paging terminal 3 in this embodiment, for example a paging device or the like may be used, whereby the method of transmitting the reply message to the paging device depends for example on the paging system used.

In the embodiment of Fig. 3, the paging service center 4 is for example a paging network controller or a wireless messaging switch.

25

30

WO 97/31306 9 PCT/FI97/00067

Methods have been developed for transmitting paging messages in connection with radio broadcasting so that they do not interfere with receiving the broadcasting. Thus the paging device includes a receiver which separates from the incoming broadcasting the paging information coded in it and examines whether the transmission is intended to the user of this particular paging device, wherein the paging device forms a signal from the message to the display means 10. The user may consequently form a connection to the service 1 in a corresponding manner as presented in the above description in connection with the embodiment of Fig. 2.

Another possible application of the present invention is that the user makes a call by using a telecommunication terminal, such as a telephone, to the telephone exchange of the information service provider, wherein the user can give the subscription data for example by dictating or tapping the telephone keys. Yet another alternative for sending the subscription request is electronic mail, which is known as such, wherein the data is given to the data processor in the electronic mail application used and transmitted via a telecommunication network or a mobile communication network to the electronic mail address of the information service provider. The transmission of the user specific authentication data to the user is performed by using paging or short message service as presented in connection with the previous embodiments.

25

30

35

10

15

20

Further, the present invention can be applied also for obtaining a personal identity number (PIN) of bank and credit cards and corresponding charge cards. Thus when the charge card is being ordered, the number of the orderer's paging device or mobile station can be given, wherein the supplier of the charge card transmits the personal identity number connected to the charge card to the paging device or the mobile station of the user. Thus it is not necessary to send the identity number by post, which decreases the possibility that the identity number falls into the wrong hands. In a corresponding manner, the method according to the invention can be used for requesting a new personal identity number for a charge card which is already in use, wherein the identity number is transmitted to the paging device or the mobile station of the user.

WO 97/31306 '10 'PCT/F197/00067

This may be necessary for example in situations when it is suspected that the identity number has fallen into the wrong hands.

The present invention is not restricted solely to the embodiments presented above, but it can be varied within the scope of the appended claims.

Claims:

5

10

15

- 1. A method for obtaining at least one item of user specific authentication data, characterized in that the user specific authentication data is obtained at least partly by using paging or a short message service.
- 2. A method according to claim 1, wherein the user specific authentication data is used for forming a connection to an information service (1), which method comprises of sending (102) of a request for transmission of the user specific authentication data from the user to the information service provider, and receiving (107) of the user specific authentication data sent by the information service provider, characterized in that the user specific authentication data is sent as a short message (6) which is received by the paging terminal (3) of the user.

3. A method according to claim 2, characterized in that the request for transmitting the user specific authentication data is sent as a short message (2).

- 4. A method according to claim 2, characterized in that the request for transmitting the user specific authentication data is sent by a method known as such.
- 5. A method according to claim 4, characterized in that the request for transmitting the user specific authentication data is made by making a call by a telecommunication terminal, such as a telephone, to the telephone exchange of the information service provider, wherein the request can be made either by dictating or in preferably by voice-frequency signals formed by touching the telephone keys.
 - 6. A method according to claim 1, wherein the user specific authentication data is used in forming a connection to the information service (1), which method comprises sending (102) of a subscription request from the user to the information service provider, wherein the subscription request comprises one or more items of user specific authentication data, and receiving (107) of the subscription data sent by the information service provider, characterized in that the user specific authenti-

30

10

15


cation data is sent to the information service provider as a short message (2).


- 7. A method according to claim 3 or 6, **characterized** in that a short message (2) is sent by the paging terminal (3) of the user.
 - 8. A method according to claim 1, wherein the user specific authentication data is used in forming a connection to an information service (1), which method comprises sending (102) a subscription request from the user to the information service provider, wherein the subscription request comprises one or more items of user specific data, and receiving (107) of the subscription data sent by the information service provider, characterized in that the request for subscription of user specific authentication data is made by making a call by a telecommunication terminal, such as a telephone, to the telephone exchange of the information service provider, wherein the request can be transmitted either by dictating or preferably by using voice-frequency signals formed by touching the telephone keys.
- 9. A method according to claim 1, wherein the user specific authentication data is used to form a connection to the information service (1), which method comprises sending (102) a subscription request from the user to the information service provider, wherein the subscription request comprises one or more items of user specific authentication data, and receiving (107) of the subscription data sent by the information service provider, characterized in that the subscription request is transmitted by using electronic mail, which is known as such.
- 10. A method according to any of claims 2, 3, 6 or 7, characterized in that the paging terminal (3) of the user is a mobile station.
 - 11. A method according to claim 10, characterized in that the mobile station is a cellular system mobile station, such as a GSM mobile station.
 - 12. A method according to claim 10, characterized in that the mobile station of the user is a paging device, such as a long distance paging device.


- 13. A system for obtaining at least one item of user specific authentication data, **characterized** in that the system comprises means (3, 4) for obtaining user specific authentication data by using at least partly paging or a short message service.
- 14. A system according to claim 13, characterized in that the means (3, 4) for obtaining user specific authentication data comprise a paging terminal (3).
- 15. A system according to claim 14, characterized in that the paging terminal (3) is a mobile station.
- 16. A system according to claim 15, characterized in that the mobile station is a cellular system mobile station, such as a GSM mobile station.
 - 17. A system according to claim 15, characterized in that the mobile station is a paging device, such as a long distance paging device.

5



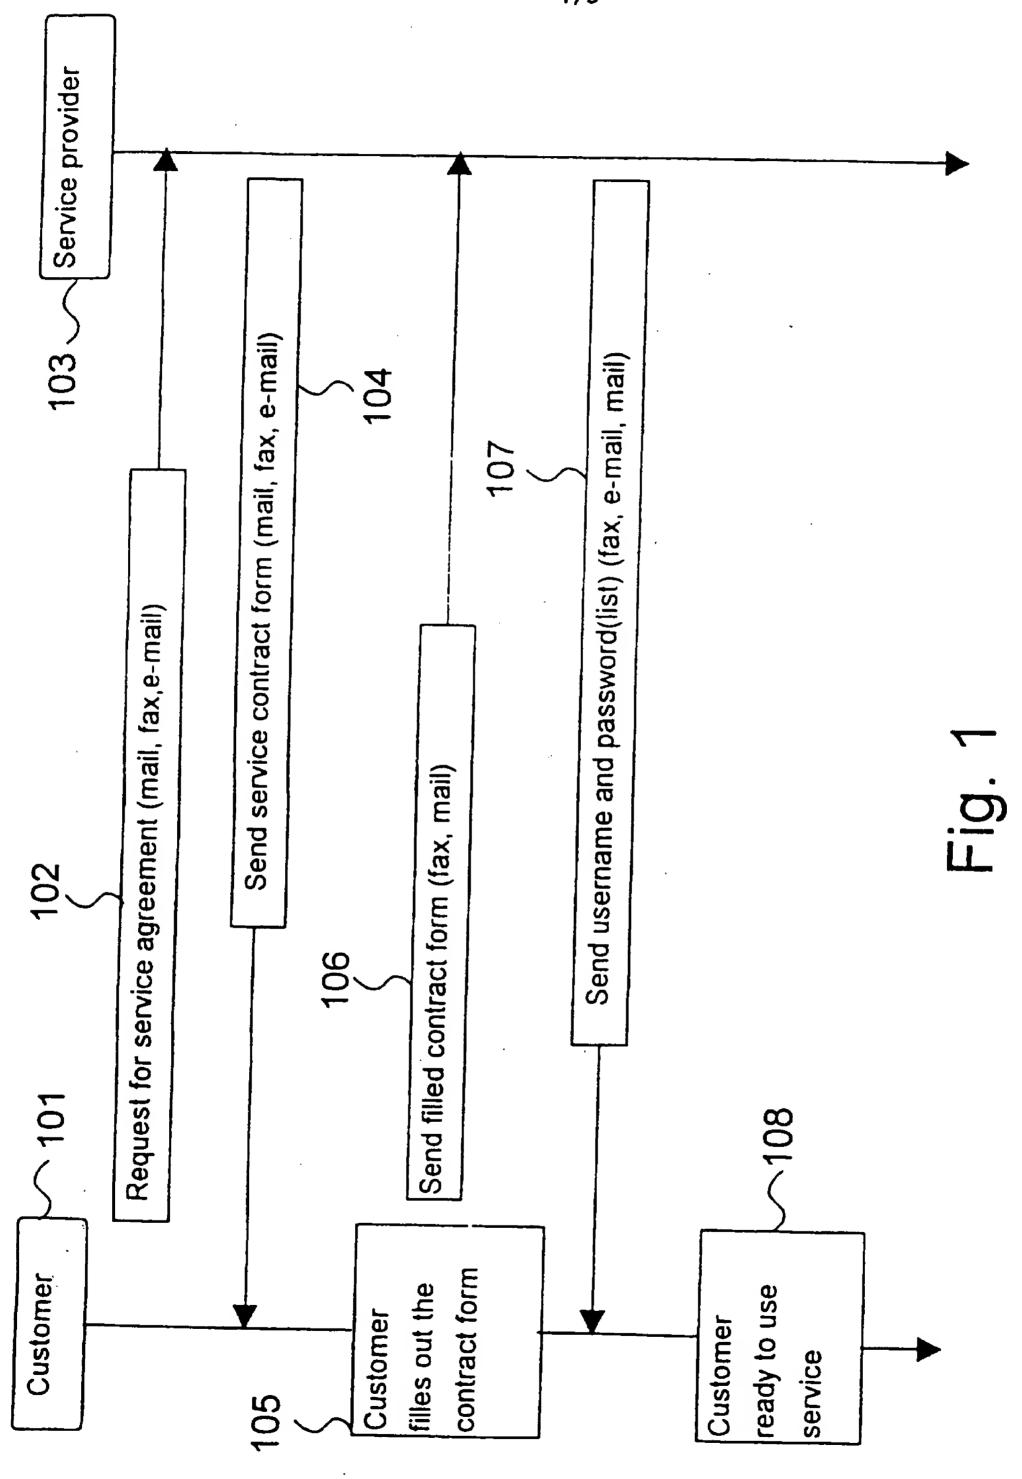

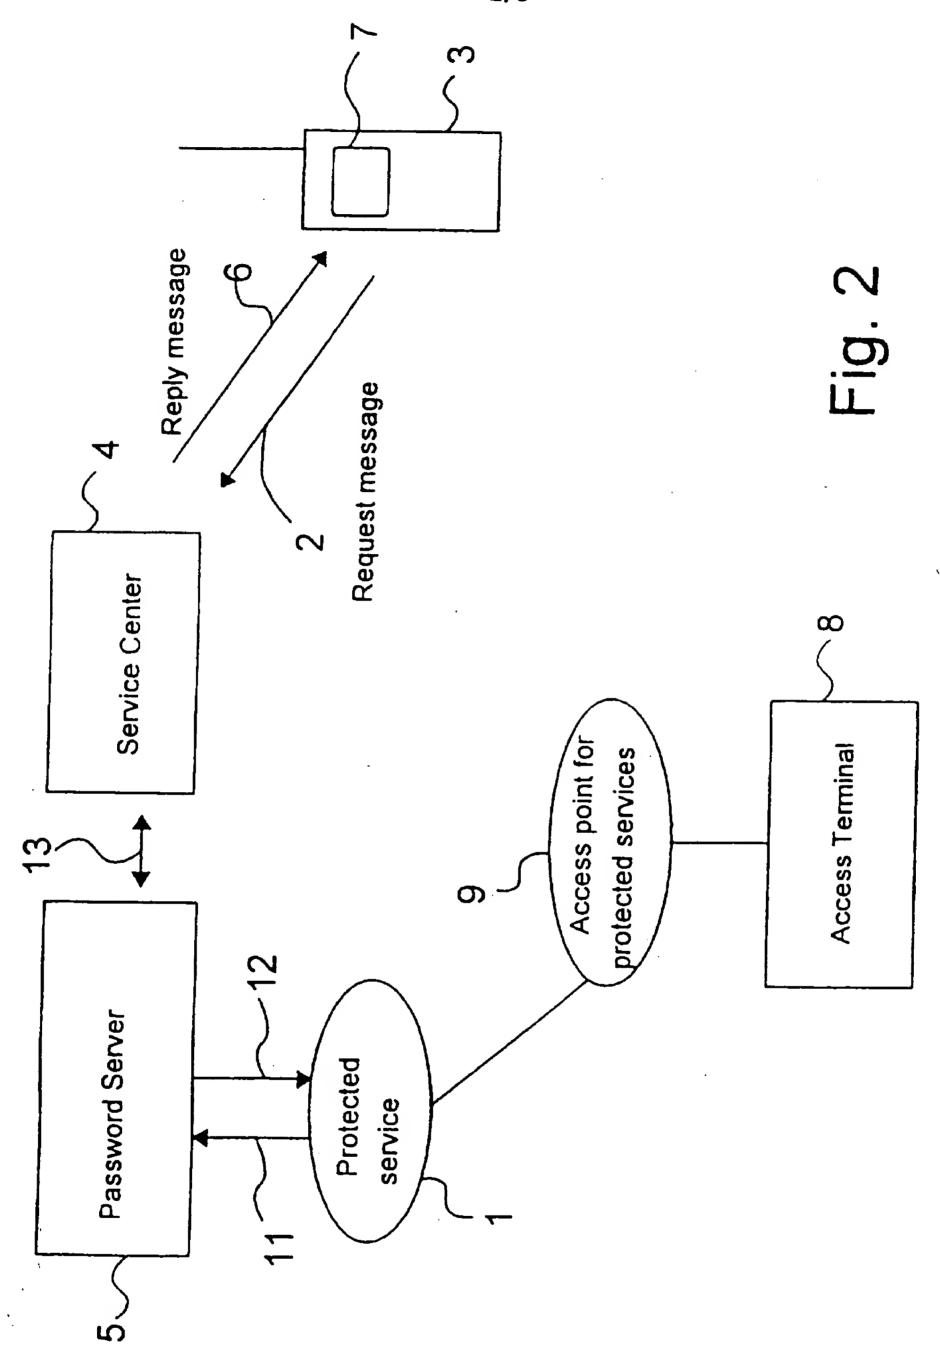

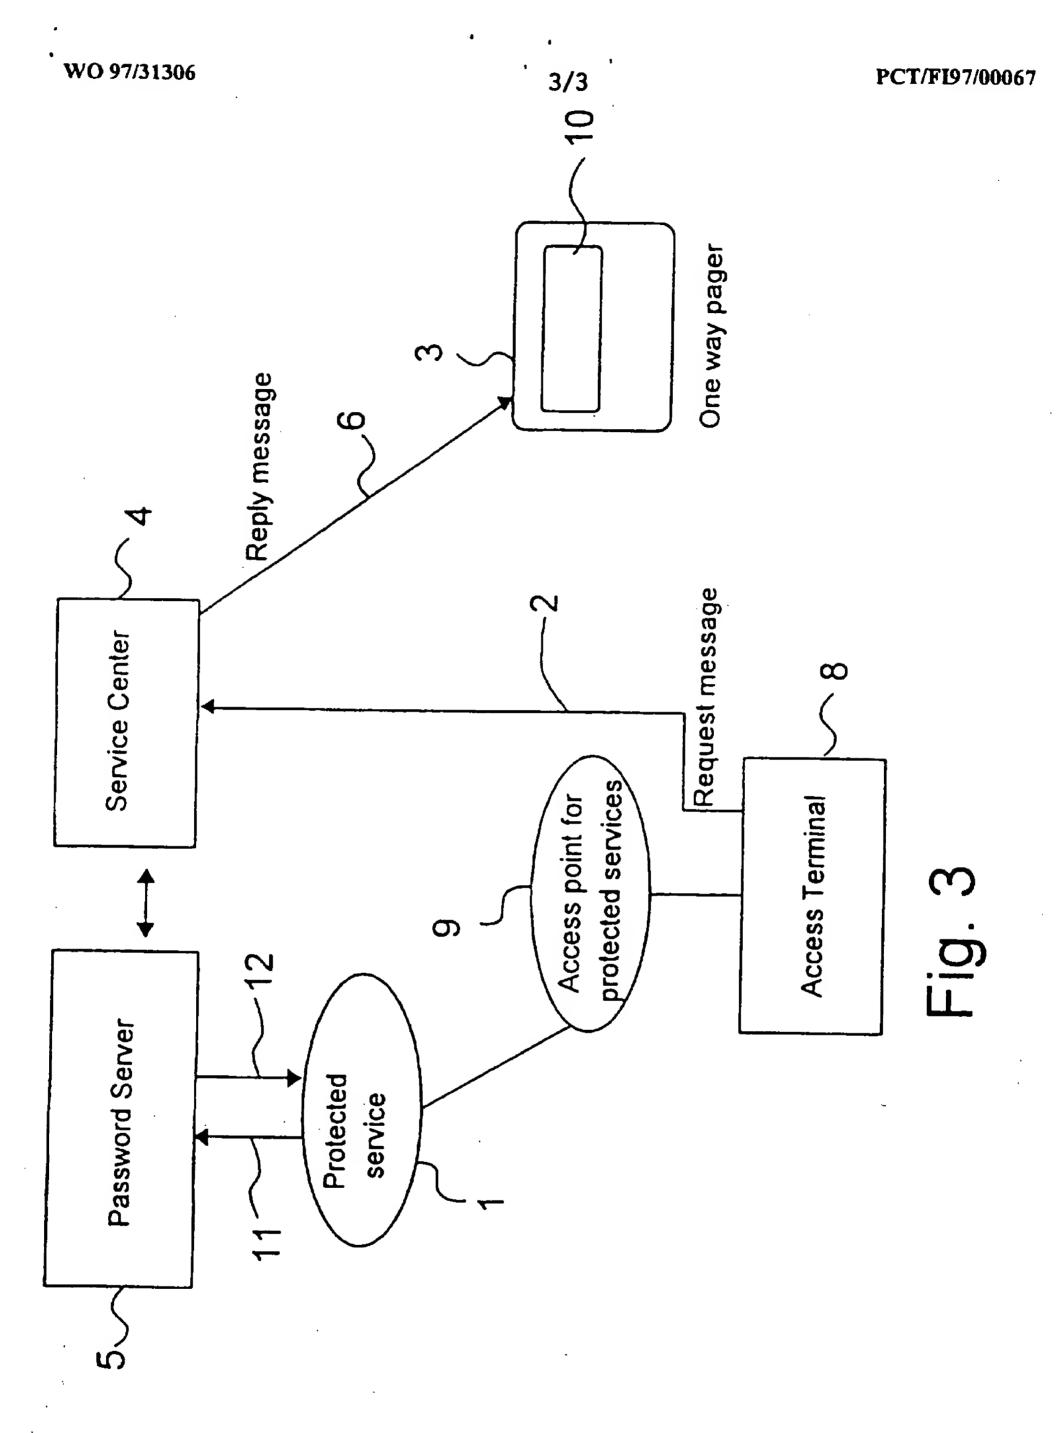

INTERNATIONAL SEARCH REPORT

International application No. PCT/FI 97/00067

			C1711 377000	
A. CLAS	SSIFICATION OF SUBJECT MATTER			
IPC6:	G06F 1/00, H040 7/38, H04L 9/32 to International Patent Classification (IPC) or to both	national classification and IP	С	
	DS SEARCHED			
	documentation searched (classification system followed	by classification symbols)		
	G06F, H04Q, H04L			
	FI, NO classes as above	the extent that such document	is are included in th	e fields searched
Electronic o	data base consulted during the international search (na	me of data base and, where pr	acticable, search ter	ms used)
				,
C. DOCL	JMENTS CONSIDERED TO BE RELEVANT	Γ .		
Category*			passages R	clevant to claim No
X	WO 9600485 A2 (TELEFONAKTIEBOLA 4 January 1996 (04.01.96), line 30 - page 4, line 9; line 31; page 9, line 1 - abstract	;	1-17	
X	WO 9519593 A1 (KEW, MICHAEL, JE (20.07.95), page 7, line 10 figure 1, abstract	95 1,	1-6,8,9, 13-17	
A		•		7,10-12
	~~~~~	•		
Furthe	er documents are listed in the continuation of Bo	x C. X See patent	family annex.	
A document to be of E erlier doc	categories of cited documents:  It defining the general state of the art which is not considered particular relevance  cument but published on or after the international filing date	the principle or theory  "X" document of particular	it with the application underlying the invent	d invention cannot be
cited to e special re	establish the publication date of another citation or other eason (as specified)	considered novel or ca step when the document "Y" document of particular	ot is taken alone relevance: the claime	d invention cannot be
means P" documen	it referring to an oral disclosure, use, exhibition or other t published prior to the international filing date but later than ity date claimed	combined with one or	in inventive step when more other such docu son skilled in the art	the document is ments, such combination
ate of the	actual completion of the international search	Date of mailing of the int	<u> </u>	
ll July		1 4	4 -07- 1997	
ame and n	nailing address of the ISA/	Authorized officer		
ox 5055, S	atent Office S-102 42 STOCKHOLM	Göran Magnusson		
	o. +46 8 666 02 86		782 25 00	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No. PCT/FI 97/00067

		01/07/97	PCT/FI 97/00067
Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9600485 A2		P 0766902	A 04/01/96 A 09/04/97
WO 9519593 A1	20/07/95 A A E G G G G J G	0 6286694 0710413 3 2300288 9 9400602 3 9614521 9 9500504	A 20/02/95 A 08/05/96 A 30/10/96 D 09/03/94 D 00/00/00 T 14/01/97